


One pre-assembled motorized curtain track systems is standard programmed to channel 1 of the remote control. When several motorized systems are pre-assembled, the systems are only programmed to a channel when this is mentioned on the order form. So it is possible that you have to program the systems to the remote control. It is not necessary to fix the Shuttle L motor to the track for programming a channel to a Shuttle L motor. Take next steps:

FIRST SELECT THE DESIRED CHANNEL



PRESS BUTTON 3x WITH A PEN

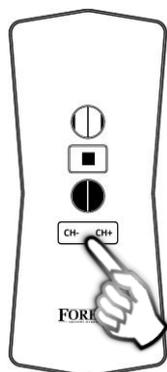

3x

LED MOVES FROM 1st → 2nd → 3rd LED



KEEP BUTTON PRESSED FOR 5 SEC.




1x 5sec.

GREEN LED STARTS BLINKING



WITHIN 10 SEC. PRESS OPEN

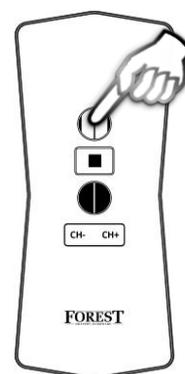

Re-adjusting the open and close end position

The OPEN and CLOSE end positions are a ready set to the curtain track. Adding extra carriers is taken into account. When the end positions need to be changed, take next steps:

→ **MOVE THE CURTAIN TO THE OPEN POSITION**

PRESS BUTTON 4x WITH A PEN



4x

LED MOVES FROM 1st → 2nd → 3rd → 4th LED



KEEP BUTTON PRESSED FOR 5 SEC.



1x for 5sec.

YELLOW LED BLINKS AND GOES OFF



Now the end positions are reset and have to be set again:

- PRESS THE CURTAIN TOWARDS CLOSE POSITION, CURTAIN WILL CLOSE AUTOMATIC.
- PRESS THE CURTAIN TOWARDS OPEN POSITION, CURTAIN WILL OPEN AUTOMATIC.
- DIRECTLY AFTER STOPPING OF THE MOTOR (AT OPEN POSITION) THE YELLOW LED WILL LIGHT UP NOW YOU CAN ADJUST THE OPEN POSITION TO DESIRED POSITION.
- WAIT UNTIL THE YELLOW LED GOES OFF, THE END POSITIONS ARE NOW STORED INTO MEMORY.

for the complete Shuttle L manual, see our website:
http://www.forestgroup.nl/products/download_brochures.html

